

Explosionproof LED Luminaire KRATEX LED

50,000 h product life
Zone 1 and 21

5 YEARS
warranty

IP 66	IK 05 IK 10
Frequency 0-50/60Hz	Rated voltage 220-240V
850°C	NON-SELV
UV	+40°C -20°C



KRATEX NS HE 600 2000-840 ET GLASS

General characteristics

- LED luminaire manufactured with high quality materials that guarantee long product life.
- Explosion protection is a delicate and complex issue. Human lives may depend on it. Zalux offers you reliable explosion protected lighting with state of the art LED technology. Designed to be used in hazardous areas where an explosive atmosphere persists for a short period, as standard illumination or as emergency illumination.
- 2 Entries of 3/4" NPT for cable gland (not included).
- Gasket NBR.
- Diffuser tube made of UV resistant polycarbonate or 3.3 borosilicate glass.
- Ends caps made of aluminium alloy with yellow polyurethane finish (RAL 1003).
- KRATEX LED is perfectly suitable for use in EX-Zones according to ATEX directive 2014/34/EU.

 II 2 G Ex db IIC T6 Gb

 II 2 D Ex tb IIIC T85 Db


Applications recommendation

- Pharmaceutical
- Chemical industry
- Oil and gas sites
- Food and agricultural industry
- Industrial facilities

Approvals and markings



Mounting possibilities



Accessories

- 10078101 Eye bolts bag
- 10078102 Fixing omegas
- 10078104 Double cable gland



10078101



10078102



10078104

Product Options

- Emergency kit: permanent, non-permanent or combined

Explosionproof LED Luminaire KRATEX LED


General technical data

Rated voltage range	220V-240V
Rated frequency	0-50Hz/60Hz
Class	I
Protection rating	IP66
Impact resistance	IK10 PC / IK05 Borosilicate glass
UV protection	Diffuser tube with UV protection
Fire protection: Flammability (UL94)	PC: V2
Fire protection: Glow wire test (EN 60695-2-11):	PC: 850 °C / Borosilicate glass: 850 °C
THD	< 10%
Chemical agents resistance	See appendix
CRI protection class	> 80
Useful Life	L80, 50000 h

Operating data | Dimensions


Designation	Special features	Luminous Flux	Emergency operation	Efficiency	Connection load	Color Temperature	X	Xm	Y	Z
		lm	lm	lm/W	W	K	mm	mm	mm	mm
KRATEX NS HE 600 2000-840 ET PC		2500	—	113	22	4000	750	640	157	197
KRATEX NS HE 600 2000-840 ET GLASS		2500	—	113	22	4000	750	640	157	197
KRATEX NS HE 600 2000-840 ET PC EB1	Emergency battery 1h	NM*	750	—	4	4000	750	640	157	197
KRATEX NS HE 600 2000-840 ET GLASS EB1	Emergency battery 1h	NM*	850	—	4	4000	750	640	157	197
KRATEX NS HE 600 2000-840 ET PC EB3	Emergency battery 3h	NM*	750	—	5	4000	750	640	157	197
KRATEX NS HE 600 2000-840 ET GLASS EB3	Emergency battery 3h	NM*	850	—	5	4000	750	640	157	197
KRATEX NS HE 1200 4000-840 ET PC		4900	—	122	40	4000	1360	1250	157	197
KRATEX NS HE 1200 4000-840 ET GLASS		5000	—	125	40	4000	1360	1250	157	197
KRATEX NS HE 1200 4000-840 ET PC EB1	Emergency battery 1h	4900	800	111	44	4000	1360	1250	157	197
KRATEX NS HE 1200 4000-840 ET GLASS EB1	Emergency battery 1h	5000	850	113	44	4000	1360	1250	157	197
KRATEX NS HE 1200 4000-840 ET PC EB3	Emergency battery 3h	4900	800	109	45	4000	1360	1250	157	197
KRATEX NS HE 1200 4000-840 ET GLASS EB3	Emergency battery 3h	5000	850	110	45	4000	1360	1250	157	197

*NM: Non-maintained mode

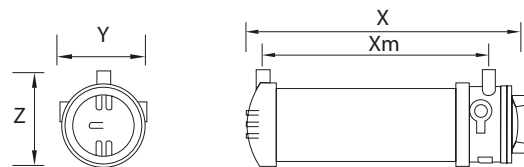

Explosionproof LED Luminaire KRATEX LED



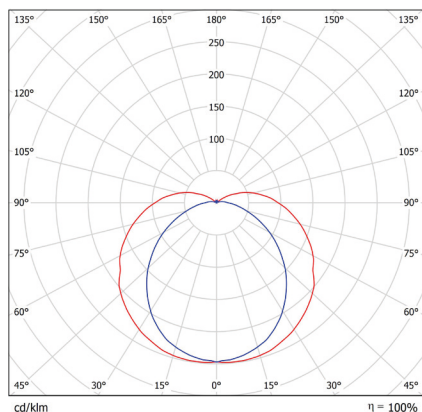


Light characteristic



KRATEX NS HE 600 2000-840 ET PC

Other models similar distribution with different intensities

Logistical data

Designation	Order Number					
		L x W x H mm	Pcs./Box	Box	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
KRATEX NS HE 600 2000-840 ET PC	10169101	780 x 240 x 180	1	5.2	56	40+40
KRATEX NS HE 600 2000-840 ET GLASS	10169102	780 x 240 x 180	1	5.9	56	40+40
KRATEX NS HE 600 2000-840 ET PC EB1	10169103	780 x 240 x 180	1	5.8	56	40+40
KRATEX NS HE 600 2000-840 ET GLASS EB1	10169104	780 x 240 x 180	1	6.5	56	40+40
KRATEX NS HE 600 2000-840 ET PC EB3	10169105	780 x 240 x 180	1	6.2	56	40+40
KRATEX NS HE 600 2000-840 ET GLASS EB3	10169106	780 x 240 x 180	1	6.9	56	40+40
KRATEX NS HE 1200 4000-840 ET PC	10169107	1390 x 240 x 180	1	9.9	28	20+20
KRATEX NS HE 1200 4000-840 ET GLASS	10169108	1390 x 240 x 180	1	10.8	28	20+20
KRATEX NS HE 1200 4000-840 ET PC EB1	10169109	1390 x 240 x 180	1	10.5	28	20+20
KRATEX NS HE 1200 4000-840 ET GLASS EB1	10169110	1390 x 240 x 180	1	11.4	28	20+20
KRATEX NS HE 1200 4000-840 ET PC EB3	10169111	1390 x 240 x 180	1	10.9	28	20+20
KRATEX NS HE 1200 4000-840 ET GLASS EB3	10169112	1390 x 240 x 180	1	11.8	28	20+20

For logistic estimations please contact our sales backoffice team

Explosionproof LED Luminaire KRATEX LED

Conformity to standards

Electrical equipment designed to be used with certain voltage limitations

EN 60598-1	Luminaires - Part 1: General requirements and tests
EN 60598-2-1	Luminaires - Part 2: Particular requirements, Section 1: General purpose luminaires

Electromagnetic compatibility

EN 55015	Limits and methods of measurement of radio disturbance characteristics of electric lighting and similar equipment. Characteristics of electric lighting and similar equipment
EN 61000-3-2	Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions
EN 61000-3-3	Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems
EN 61547	Equipment for general lighting purposes EMC immunity requirements
EN 62471	Photobiological safety of lamps and lamp system
EN 62493	Assessment of lighting equipment related to human exposure to electromagnetic fields

 Ex db IIC T6 Gb  Ex tb IIIC T85°C Db

EN 60079-0:20012/A11:2013, EN 60079-1:2014, EN 60079-31:2014
ATEX Directive 2014/34 EU

APPENDIX

Chemical Agents	Polyester	Polycarbonate	Aluminium	PMMA	Stainless steel
Acetic acid 10%	✓	✓	✓	✓	✓
Acetone	Ø	X	✓	X	✓
Alcoholic beverages	✓	✓	✓	Ø	✓
Aluminium sulphate	✓	✓	✓	✓	Ø
Ammonia 5%	Ø	X	✓	✓	✓
Aniline	Ø	X	✓	X	✓
Arsenic acid 20%	Ø	✓	✓	✓	✓
Benzene	X	X	✓	X	Ø
Bencylic alcohol	X	X	Ø	X	Ø
Bromine	X	X	X	X	X
Calcium Chloride	✓	✓	✓	✓	Ø
Calcium nitrate	✓	✓	✓	✓	Ø
Carbon tetrachloride	X	X	✓	X	Ø
Carbonic acid	✓	X	✓	X	✓
Caustic potash 5%	X	X	X	✓	Ø
Cement	✓	✓	✓	✓	Ø
Hydrochloric acid 1-5%	Ø	✓	X	✓	X
Chlorine liquids (vapours)	X	X	X	X	Ø
Chloroform	X	X	✓	X	✓
Chromic acid	X	Ø	X	Ø	Ø
Citric acid 20%	✓	✓	✓	✓	Ø
Copper sulphate	✓	✓	X	✓	Ø
Diesel-naphta oil	✓	Ø	✓	✓	✓
Ethyl alcohol 30%	✓	✓	✓	Ø	✓
Ethyl chloride	X	X	Ø	X	✓
Ethyl ether	✓	X	✓	X	Ø
Food oils and fats	✓	X	✓	✓	✓
Formic acid 10%	Ø	✓	X	✓	Ø
Glycerine	✓	✓	✓	✓	✓
Hexane	Ø	✓	✓	✓	✓
Iodine	✓	X	Ø	✓	X
Isopropyl alcohol	✓	Ø	✓	Ø	Ø
Lubricating oil	✓	✓	✓	✓	✓
Magnesium sulphate	✓	✓	✓	✓	✓
Methanol	✓	X	✓	Ø	✓
Mineral oils	✓	✓	✓	✓	✓
Nitric acid 20%	X	Ø	X	✓	✓
Oxygen	✓	✓	✓	✓	✓
Ozone	✓	✓	✓	✓	Ø
Perchloric acid 10%	X	✓	X	✓	X
Petrol	✓	X	✓	✓	✓
Phenol	Ø	X	✓	X	Ø
Potassium bromide	✓	✓	Ø	✓	Ø
Potassium nitrate	✓	✓	✓	✓	Ø
Potassium permanganate	✓	✓	✓	✓	Ø
Sea climate	✓	✓	Ø	✓	Ø
Silicon oils	✓	✓	✓	Ø	✓
Soda bleach 15%	✓	X	Ø	✓	Ø
Sodium chloride	✓	✓	Ø	✓	Ø
Sodium hydroxide 5%	✓	X	X	✓	Ø
Sodium sulphate	✓	✓	✓	✓	Ø
Sugar	✓	✓	✓	✓	✓
Sulphur	✓	✓	✓	✓	Ø
Sulphuric acid 30%	X	✓	X	✓	X
Toluene	X	X	✓	X	✓
Trichloroethylene	X	X	✓	X	Ø
Zinc sulphate	✓	✓	Ø	✓	Ø

✓ Resistant Ø Relatively resistant X Non-resistant